


DS-D5043FC 42.5" Monitor



Key Features

- Support 8bit/10bit 2-ch LVDS(1920 x 1080) HD display
- Adopt 3-D digital comb filter
- Support audio output
- True color OSD and user-friendly operation menu
- 1 channel HDMI 1.4 input interface, support HDCP
- Adopt 3D noise reduction technology
- Support high definition JPEG decoding
- Programmable 12-bit RGB gamma correction technology
- Support software spread-spectrum technology to reduce EMI radiation
- Adopt Mstar ACE-5 auto color, image enhancement engine, improve image contrast, detail and edge
- High reliability and stability, 24/7 operation

Interfaces

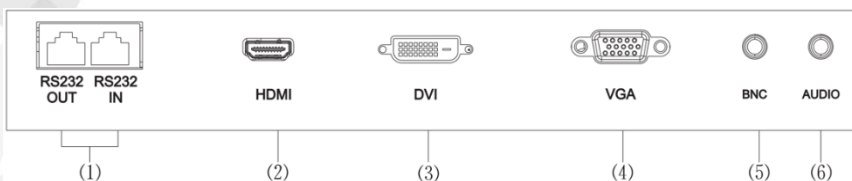

NO.	Description
1	RS232(IN/OUT): Serial input/output
2	HDMI: HDMI signal input
3	DVI: DVI signal input
4	VGA: VGA Analog Signal Input
5	BNC IN: BNC signal input
6	AUDIO IN

Model


DS-D5043FC



Specifications

Model	DS-D5043FC	
Backlight	LED Backlight	
Screen Size	42.5 inch	
Pixel Pitch	0.4902 mm (H) × 0.4902 mm (V)	
Max Resolution	1920×1080@60Hz	
Brightness	260 cd/m ²	
Contrast	1200: 1	
Response Time	8 ms	
Color	16.7M	
Active Area (H×V)	945.2 mm x 533.4 mm	
Viewing Angle	Horizontal 178°, vertical 178°	
Interfaces	DVI input	1
	HDMI input	1
	VGA input	1
	BNC input	1
	PC Audio in	1, 3.5 mm mini-jack
Loudspeaker	10W x 2, 8Ω	
Power Supply	AC 100 ~ 240 V , 50/60 Hz	
Power Consumption	≤65W	
Standby Power Consumption	≤ 0.5 W	
Working Temperature	0 to 40 ° C (32 to 104 ° F)	
Working Humidity	20 to 80 % RH non-condensing	
Storage Temperature	-10 to 55 ° C (14 to 140 ° F)	
Storage Humidity	10 to 90% RH non-condensing	
Color of Casing	Black	
VESA	200mm x 300mm 4-M6	
Dimensions(W*H*D)	968.2 mm x 565.2 mm x 78.5 mm	
Package Dimension (W×H×D)	1200 mm x 785 mm x 210 mm	
Gross Weight	12.8Kg ± 1.5Kg	
Net Weight	9.1kg ± 1.5Kg	
Interfaces	Power cord	1
	Remote control	1
	Battery	2
	User manual	1
	Warranty card	1
Bracket	Base bracket	Optional DS-DM4302B
	Wall mounted	Optional DS-DM4255W
*Note	All specifications mentioned above are subject to the actual product	

Dimensions (unit: mm)

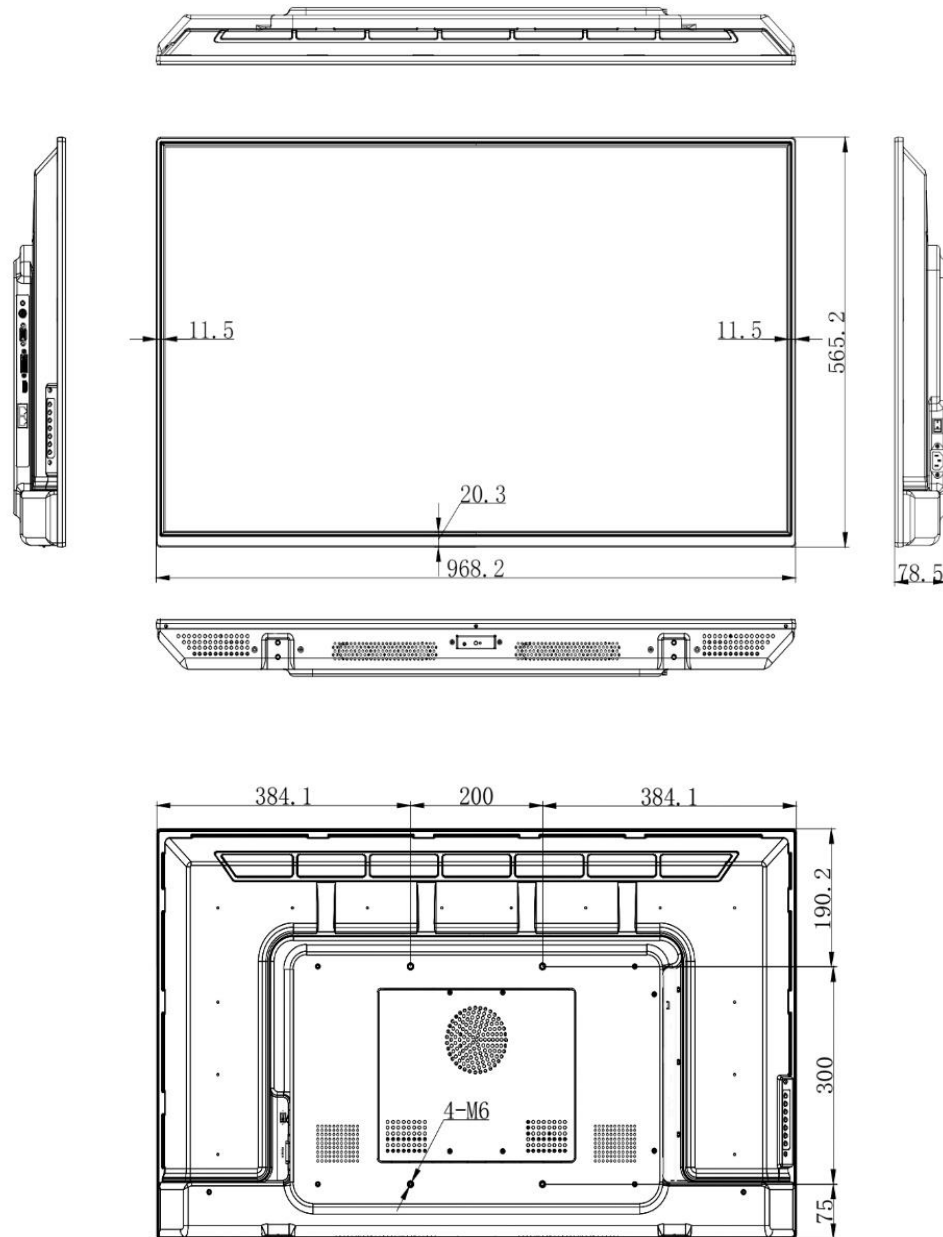

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Hong Kong
T +852-2151-1761